

Globalgrip® Shower

unglazed porcelain tiles

Product description Unglazed, porcelain floor tiles, manufactured in accordance with EN 14411 B1a and ASTM standards. Mosa Globalgrip shower pieces are modular with a 3/16" joint and match Global Collection tiles in color and size. Unglazed, fully vitrified, porcelain sloping shower edge tiles and sloping shower corner pieces with built-in slope approximately 1 : 10 (fall 0.4 inch).

Sizes 6" x 6"

Usage area Our frost proof floor shower pieces may be used in residential and commercial environments.

Technical data / conformity standards


Technical data	ASTM test	Requirements	Royal Mosa
Water absorption	C 373	≤ 0.5%	surface: < 0.05%; body: ≤ 0.3%
Facial dimension (range)	C 499	+/- 0.5%	0.19%
Actual thickness	C 499		0.32 - 0.71 inch = 10/32" - 23/32"
Freeze-thaw cycle	C 1026		frost proof
Coefficient of friction	C 1028	≥ 0.6	0.90 (dry) / 0.82 (wet)

Installing instruction The (corner) skirtings with slope can be laid using all mortars, glues and grouting materials suitable for fully vitrified tiles and using all common installation methods. For suitability and laying guidelines, tile installers should first consult the relevant mortar manufacturer. The supporting surface must be very level, able to bear the load and resistant to compression and tensile strain, permanently dry and free of dirt, joints or cracks. There should be a 0.4 inch recess in the supporting surface the same size as the shower tray to be built.

Our limited warranty Royal Mosa warrants that its first choice ceramic tiles are manufactured to ANSI-Standards A 137.1 and meet or exceed the requirements of the standard. Please consult the company's Terms and Conditions for Sale for complete product warranty details.

Maintenance Please consult our Cleaning and Maintenance leaflet.

Accessories

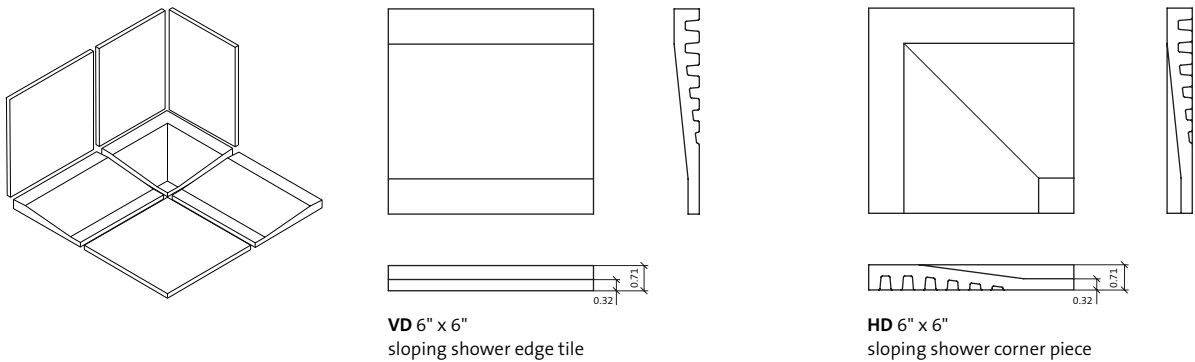

Like any material, Royal Mosa's ceramic tiles can become slippery when wet. Care should be taken to keep the surface dry at all times. Our tiles should be installed in accordance with the current application guides of the Tile Council of America and/or American National Standards Institute guides and standards. Errors and omissions excepted.

This technical product sheet replaces all previous versions. For the most actual version see www.mosa.nl.



Royal Mosa
 Meerssenerweg 358
 P.O. Box 1026
 NL-6201 BA Maastricht
 T +31 (0)43 368 92 29
 F +31 (0)43 368 93 56
 usa@mosa.nl
 www.mosa.nl



Mosa Tiles have been certified Silver by MBDC/EPEA, for their material content, recyclability and manufacturing characteristics.